


VP/AW uPVC PIPES

COMPLY WITH JIS K6741: 2016

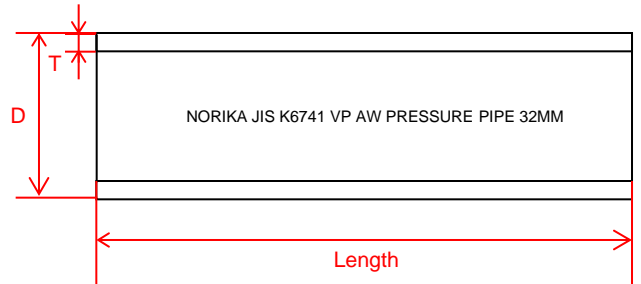

CROSS SECTIONAL VIEW

FLUID AND APPLICATIONS :

VP/AW PIPES: Generally convey pressured fluids and are commonly used for industrial application in combination with pumps and mechanical plants.

STANDARD SPECIFICATIONS

Pipe Standard	Class VP/AW
Working Pressure	10 Bar (145 PSI)
Standard Length	5.8 meters
Standard Color	Grey
Material	uPVC

DIMENSIONS

SKU	DN (mm)	D (mm)	T (mm)	L (mm)	WEIGHT (kg)
PIPAW015	15	21.8-22.2	2.7-3.3	5800	1.52
PIPAW020	20	25.8-26.2	2.7-3.3	5800	2.65
PIPAW025	25	31.8-32.2	3.1-3.9	5800	2.84
PIPAW035	35	37.8-38.2	3.1-3.9	5800	3.21
PIPAW042	42	47.8-48.2	3.6-4.4	5800	4.68
PIPAW050	50	59.8-60.2	4.1-4.9	5800	6.65
PIPAW065	65	75.7-76.3	4.1-4.9	5800	8.00
PIPAW080	75	88.7-89.3	5.5-6.3	5800	13.05
PIPAW100	100	113.6-114.4	6.6-7.6	5800	20.20
PIPAW125	125	139.2-140.8	7.0-8.0	5800	30.00
PIPAW150	150	164.5-165.5	8.9-10.3	5800	39.70
PIPAW200	200	215.3-216.7	10.3-11.7	5800	67.00
PIPAW250	250	266.1-267.9	12.7-14.5	5800	100.10
PIPAW300	300	317.0-319.0	15.1-17.3	5800	144.00