
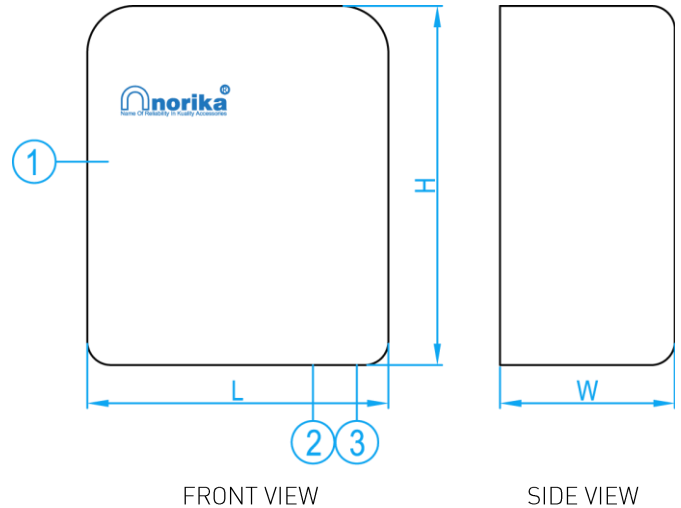


SENSOR OPERATED HAND DRYER

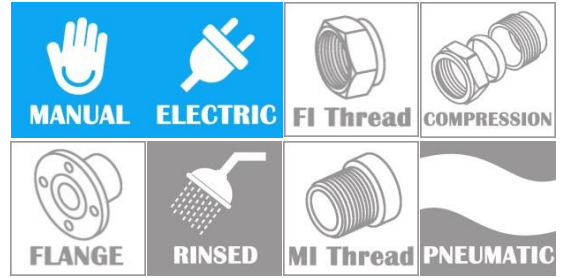

| CHARACTERISTIC |
|--|
| • Automatic-Touch Free. |
| • Efficient and Safe-Clean warm air dries hand every time. |
| • Hygienic-Cross infection risks are dramatically reduced. |
| • Economical-Auto stop acts instantly after use. |

| COMPONENT PARTS | | |
|-----------------|--------|---------------|
| ITEM | PARTS | MATERIAL |
| 1. | Cover | ABS |
| 2. | Blade | ABS |
| 3. | Sensor | Circuit Board |

STANDARD SPECIFICATIONS

| SKU | VOLTAGE RATING | POWER | MOTOR POWER | HEATER POWER | INSULATION LEVEL | NOISE | TEMPERATURE OF HOT AIR |
|---------|----------------|-------|-------------|--------------|------------------|---------|------------------------|
| HDN165A | AC200V~230V | 1650W | 60W | 1580W | E | < 70 dB | 55°C~65°C |

STANDARD SPECIFICATIONS

| SENSING DISTANCE | MOTOR SPEED | WIND SPEED | FLOW RATE | PROTECTION TIME | DIMENSION | WEIGHT (kg) | PCS/CTN |
|------------------|-------------|------------|-----------------------|-----------------|---------------------------------|-------------|---------|
| 5cm~20cm | 2500rpm | >11m/sec | 2 m ³ /min | 1 min | 280mm (H) x223mm (L) x155mm (W) | 2.60 | 6 |