


STAINLESS STEEL HEAVY DUTY AIRTIGHT & WATERTIGHT RECESSED COVER & FRAME




COMPLY WITH SS30:1999 (400KN)
BSEN 124: 1994
BS9124:2008

Type of Weight (Symbol)	SS30 Grade	Design Load	Place of Installation	BSEN124	Design Load
	A1	400KN	In carriageways of expressways, arterial, industrial roads and parking areas for all types of road vehicles.	D400	400KN

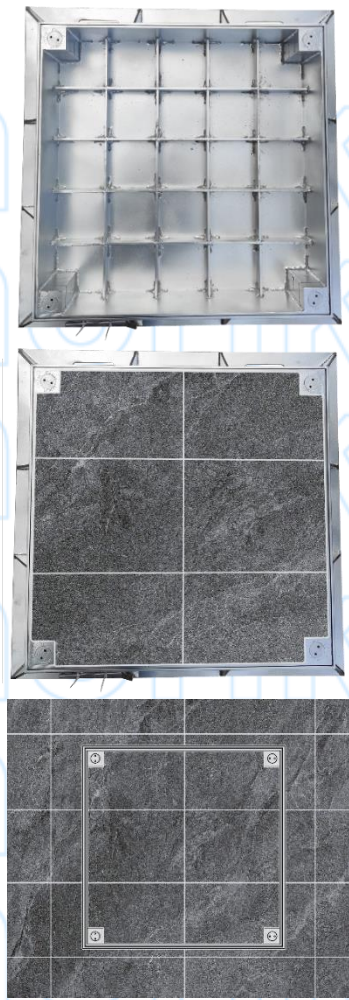


INSTALLATION EFFECT


Norika designed keyhole system



SECTION A-A

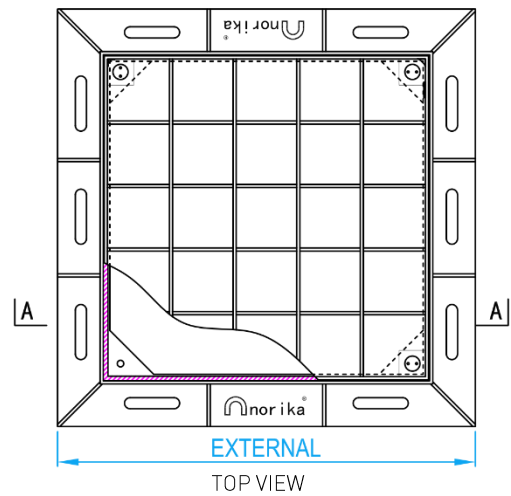

TOP VIEW



KEY HOLE



Note: 4 bolts and rubber seal to ensure airtight and watertight.

STANDARD SPECIFICATIONS

SKU	MATERIAL	INTERNAL OPENING (mm)	EXTERNAL (mm)	H (mm)	THICKNESS (mm)	WEIGHT (kg)	Remarks / Optional
SSHDRMCAT-A1	AISI304	600 x 600	800 x 800	140	6	73	Heavy Duty
SSHDRMCAT316L-A1	AISI316L	600 x 600	800 x 800	140	6	73	Heavy Duty