




# STAINLESS STEEL LIGHT DUTY RECESSED COVER & FRAME (GRADE A15)



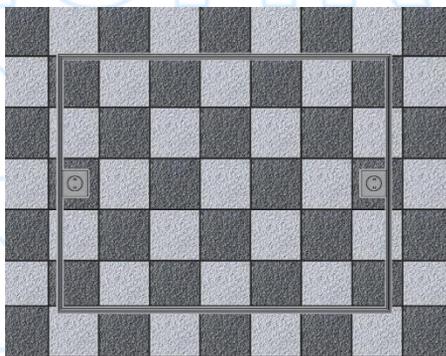


COMPLY WITH SS EN 124-2:2021, GRADE A15  
SS 30:1999 (2012), GRADE C

Type of Weight (Symbol)	SS EN 124-2	Design Load	Place of Installation	SS30 Grade	Design Load
	A15	30KN	In areas imposing particularly high wheel loads, eg. aircraft pavements.	C	30KN

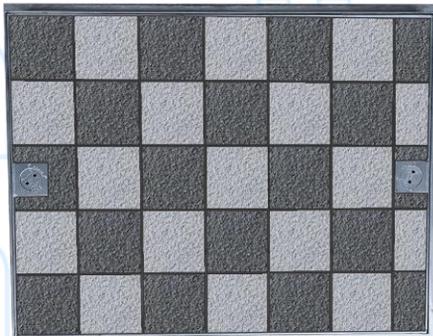

INSTALLATION EFFECT

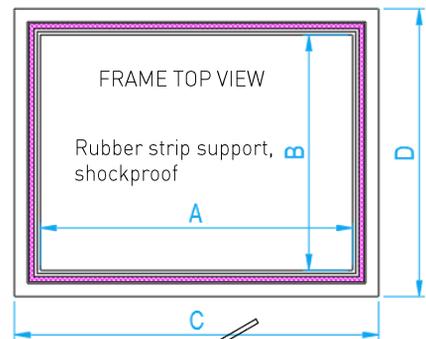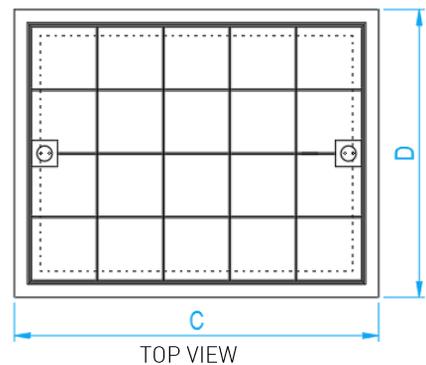

KEY HOLE



Norika designed keyhole system

## DIMENSIONS

SKU	MATERIAL	INTERNAL OPENING AxB (mm)	EXTERNAL CxD (mm)	HEIGHT H (mm)	Remarks/ Optional
SSRICC	Stainless Steel 304	600x450	700x550	64.5	Light Duty Recessed
SSRICC316L	Stainless Steel 316L	600x450	700x550	64.5	Light Duty Recessed