



STAINLESS STEEL MEDIUM DUTY RECESSED MANHOLE COVER & FRAME

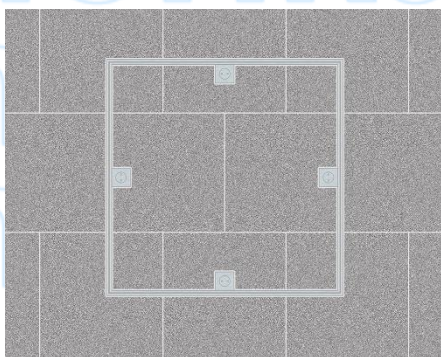


COMPLY WITH SS30:1999 (125KN)


| Type of Weight (Symbol) | SS30 Grade | Design Load | Place of Installation | BSEN124 | Design Load |
|-------------------------|------------|-------------|---|---------|-------------|
| | B | 125KN | On footways where it is possible for a vehicle to mount or occasionally open to light vehicle to use and car parking decks. | B125 | 125KN |

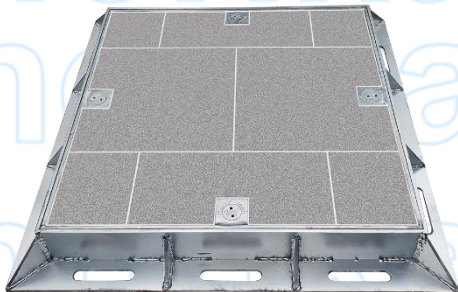

INSTALLATION EFFECT

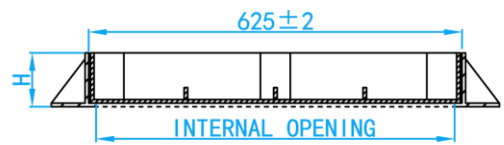

SECTION A-A

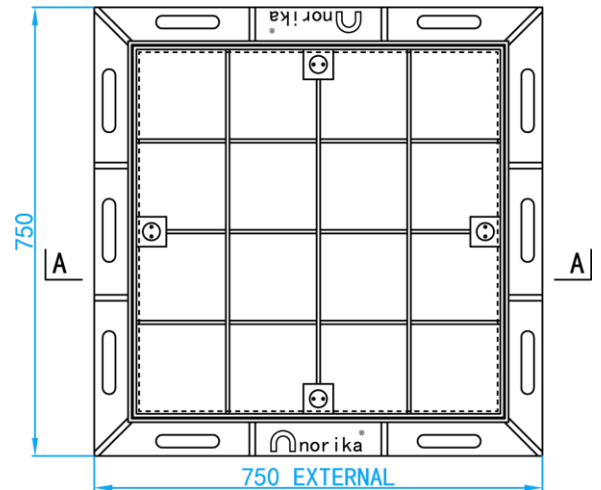

TOP VIEW



KEY HOLE

Norika designed keyhole system

STANDARD SPECIFICATIONS

| SKU | MATERIAL | INTERNAL OPENING (mm) | EXTERNAL (mm) | H (mm) | THICKNESS (mm) | WEIGHT (kg) | Remarks / Optional |
|-------------|----------|-----------------------|---------------|--------|----------------|-------------|--------------------|
| SSMDRMC | AISI304 | 600 X 600 | 750 X 750 | 90 | 6 | 48.5 | Medium Duty |
| SSMDRMC316L | AISI316L | 600 X 600 | 750 X 750 | 90 | 6 | 48.5 | Medium Duty |