


# ZPC - EPOXY AND ZINC COATED CAST IRON HUBLESS TRAPS



COMPLY WITH BS EN877: 2021  
BS EN 598: 2007

## COATING CHARACTERISTIC

ITEM	LAYERS	THICKNESS
1	Internal Coating	Min. 250µm
2	A Lay Of Metallic Zinc	130g/m <sup>2</sup>
3	External Coating	Average thickness ≥70µm, local minimum thickness not less than 50µm

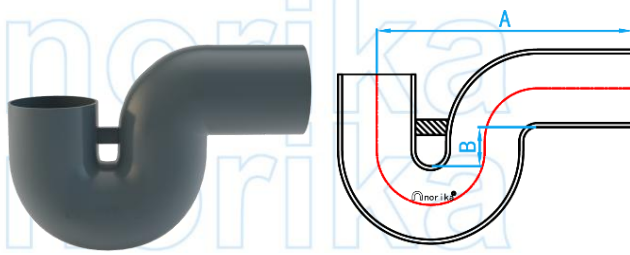


CROSS SECTIONAL VIEW

### P-TRAP (100mmx100mm)

#### DIMENSIONS

SKU	A (mm)	B (mm)	WEIGHT (kg)
HUBZPT100	358.5	53.5	7.12

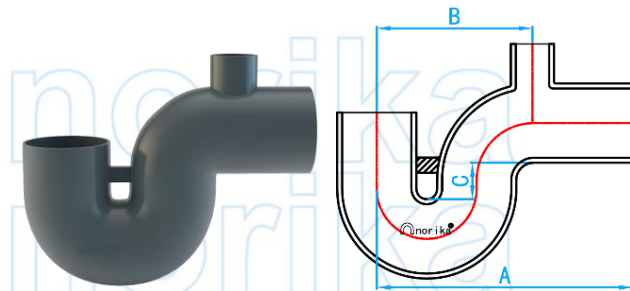


CROSS SECTIONAL VIEW

### P-TRAP (100mmx100mmx50mm)

#### DIMENSIONS

SKU	A (mm)	B (mm)	C (mm)	WEIGHT (kg)
HUBZPT10050	358.5	225	53.5	7.05

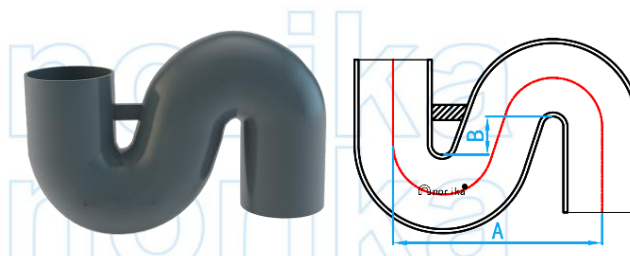


CROSS SECTIONAL VIEW

### S-TRAP (100mmx100mm)

#### DIMENSIONS

SKU	A (mm)	B (mm)	WEIGHT (kg)
HUBZST100	305	55.7	8.50

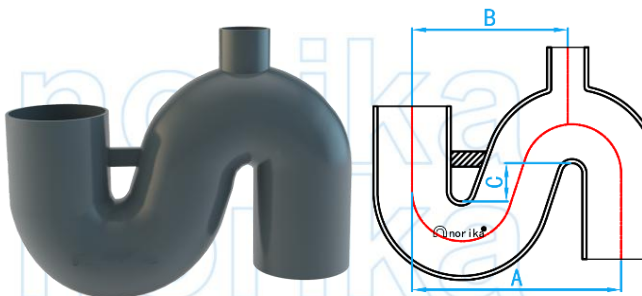

CROSS SECTIONAL VIEW

### S-TRAP (100mmx100mmx50mm)

#### DIMENSIONS

SKU	A (mm)	B (mm)	C (mm)	WEIGHT (kg)
HUBZST10050	305	228	55.7	7.75

**Notes:** The tolerance for Weight is ±10%.