

STAINLESS STEEL 316L PRESS FIT FITTINGS (M PROFILE)


COMPLY WITH BSEN1254-2: 1998

MI 90° ELBOW



The Complete Press-Fit Solution by Norika

A Product of the nPressGuard® Solution

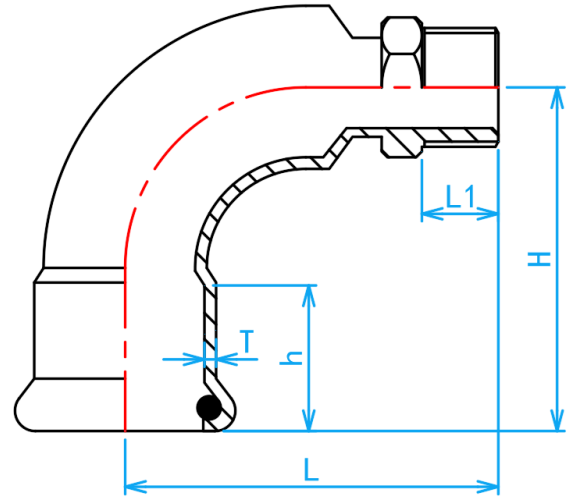

CROSS SECTIONAL VIEW

STANDARD SPECIFICATION

Working Pressure	16 Bar
Working Temperature	0 ~ 85°C
Applications	Hot and cold potable water system.

DIMENSIONS

SKU	SIZE (mm × inch)	H (mm)	L (mm)	h (mm)	L1 (mm)	T (mm)	WEIGHT (kg)	PCS/CTN
SS316LPFNMI01515	15 × 1/2" BSPT	43.0	42.0	20	15	1.5	0.060	300
SS316LPFNMI02015	22 × 1/2" BSPT	50.0	46.0	21	15	1.5	0.080	200
SS316LPFNMI02020	22 × 3/4" BSPT	50.0	50.0	21	16	1.5	0.092	160
SS316LPFNMI02515	28 × 1/2" BSPT	60.0	68.0	23	19	1.5	0.120	100
SS316LPFNMI02525	28 × 1" BSPT	60.0	68.0	23	19	1.5	0.145	70
SS316LPFNMI03515*	35 × 1/2" BSPT	72.0	78.0	26	15	1.5	0.162	50
SS316LPFNMI03525*	35 × 1" BSPT	72.0	73.0	26	19	1.5	0.180	50
SS316LPFNMI03535	35 × 11/4" BSPT	72.0	74.0	26	21	1.5	0.225	55
SS316LPFNMI04225*	42 × 1" BSPT	85.0	93.0	26	19	1.5	0.255	50
SS316LPFNMI04242	42 × 1 1/2" BSPT	85.0	84.0	31	21	1.5	0.300	33
SS316LPFNMI05025	54 × 1" BSPT	105.0	112.0	36	19	1.5	0.365	40
SS316LPFNMI05050	54 × 2" BSPT	105.0	105.0	36	26	1.5	0.485	21
SS316LPFNMI06565	67 × 2 1/2" BSPT	143.0	131.5	50	26	1.8	0.970	12

*This item requires special ordering. Please consult with a salesperson for the estimated lead time.