
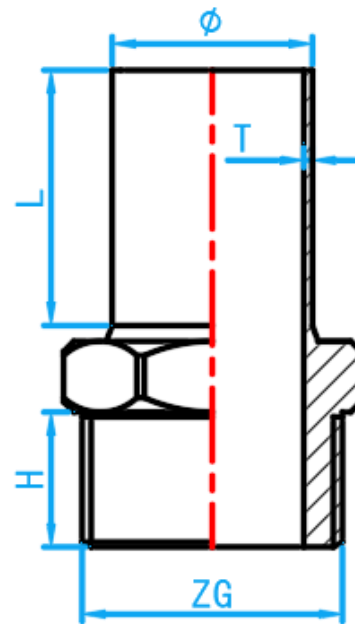


STAINLESS STEEL 316L PRESS FIT FITTINGS (M PROFILE)

COMPLY WITH BSEN1254-2: 1998

[MI] PIPE


A Product of the nPressGuard® Solution

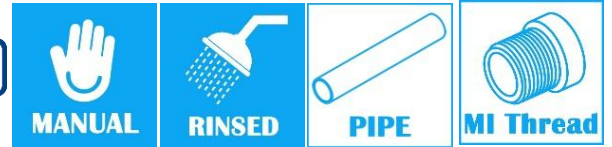

CROSS SECTIONAL VIEW

STANDARD SPECIFICATION

Working Pressure	16 Bar
Working Temperature	0 ~ 85°C
Applications	Hot and cold potable water system.

DIMENSIONS

SKU	SIZE (mm)	ZG (inch)	Ø (mm)	T (mm)	L (mm)	H (mm)	WEIGHT (kg)	PCS/CTN
SS316L PPFNMIP01515	15	1/2" BSPT	15	1.5	35	15	0.050	500
SS316L PPFNMIP02020	22	3/4" BSPT	22	1.5	36	16	0.070	200
SS316L PPFNMIP02525	28	1" BSPT	28	1.5	38	19	0.140	150
SS316L PPFNMIP03535	35	1 1/4" BSPT	35	1.5	40	21	0.150	50
SS316L PPFNMIP04242	42	1 1/2" BSPT	42	1.5	45	21	0.190	50
SS316L PPFNMIP05050	54	2" BSPT	54	1.5	50	26	0.335	60